

Optimum 2000 PLATFORM LIFT FOR GOODS



About the Optimum 2000

The Optimum 2000 Goods Lift is a high quality, reliable, vertical platform lift that is supplied complete with its own small footprint enclosure. This is a self-supporting platform lift which will enhance the value of any building. Installation costs are kept to a minimum ensuring excellent value with a low ownership cost. The 0.55kw energy efficient motor uses 75% less energy than other models of platform lifts. The unit is compliant with Part M of the Building Regulations and has the following features as standard:

- **Code Compliance** - MD 2006/42/EC
- **Testing** - Fully load tested and CE marked
- **Maximum Travel** - Up to 15m
- **Floors served** - Up to 6
- **Entrance Door** - On three sides with either hand hinging
- **Platform Size** - 1120mm wide x 1480mm long (see table on reverse for other sizes)
- **Footprint** - 1250mm wide x 1560mm long
- **Floor Recess** - 60mm or ramp
- **Enclosure** - Modular self supporting
- **Drive System** - Guided Chain
- **Speed** - 0.15m/s
- **Warranty** - 12 months parts and labour, 5 years on motor and gearbox and 10 years on drive chains
- **Capacity** - 500kg
- **Finish** - Hard wearing powder coat RAL 9010 (other colours available)
- **Power Supply** - 240v (single phase, 16 amp)
- **Recommended use** - secure and evenly distributed loads
- **Controls** - call and send at landings
- **Door operation** - manual (auto doors available as an option)




No-fuss Installation

The Optimum 2000 Goods Lift requires little in the way of building works with a 60mm deep pit, a 1590mm x 1280mm vertical hole through the building and a 16 amp power supply to the top floor being the only necessities for most installations to be carried out.

This unit comes complete with it's own scaffolding and there is no need to install lifting beams.

Optimum 2000 PLATFORM LIFT FOR GOODS

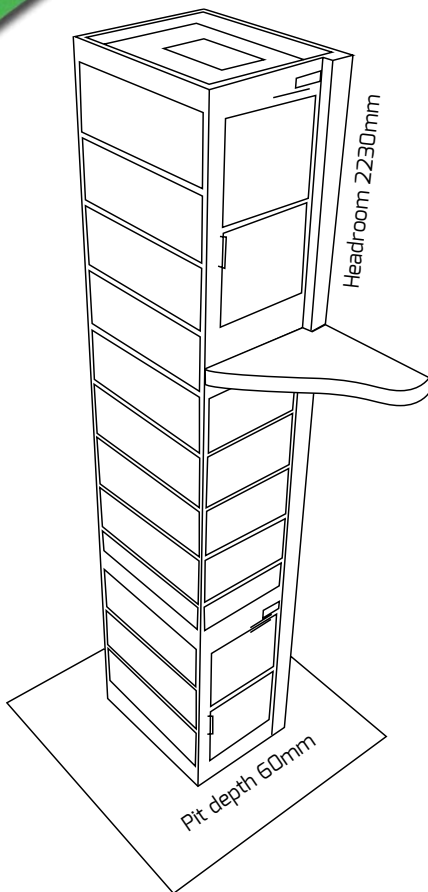


Vertical hole through building
(standard size)




1280mm

1590mm

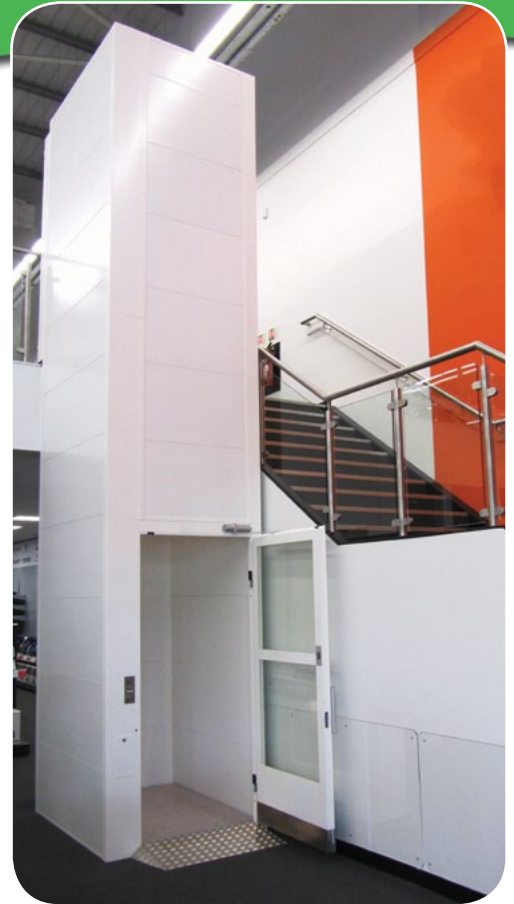

Patented Drive System



Transmission unit with guide, guide shoe, car attachment, chain and guide elements

Optimum 2000 Goods Lift is the most energy efficient platform lift on the market today saving as much as 75% of the energy used by other platform lift systems. The .55kw motor is housed within the framework of the lift and powers a robust guided chain system that makes Optimum Goods Lift the most economical and reliable solution to your platform lift requirements.

Available sizes

Platform Size	Vertical Hole
1020x1480	1180x1590
1020x1680	1180x1790
1120x1480*	1280x1590*
1120x1680	1280x1790
1220x1480	1380x1590
1220x1680	1380x1790

*Standard size. Special sizes available on request.


Range of Door Designs



Glazed half height



Steel door with vision panel and fire rated option

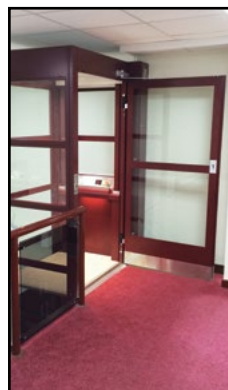

Fully glazed door with fire rated option